


## ELIKA 700 C

### UHF Aerials

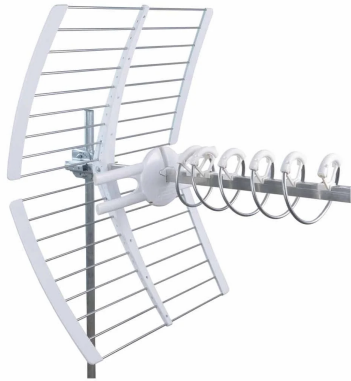

Helical UHF band aerial with F connector, it is an evolution of the Loop Yagi technology, already adopted to Fracarro.

### Technical Chars

- Pre-assembled directors, radiator and reflectors snap onto a slide already present on the cradle; **assembly** is completed **without** the need for any **tools**.
- Special attention was paid to the choice of materials to achieve higher **robustness**.
- High gain and **extraordinary directivity with almost no side lobes**.
- Innovative pole mount with zenith adjustment as standard and knurled surface for optimum strength and hold to the pole, and **large butterfly nut** for **tightening without the need for any tools**.
- An **LTE filter** has been inserted into the dipole radiator to guarantee the quality of the distributed signal and achieve excellent filtering of **5G and 4G interfering** signals in the LTE band (694-860 MHz) reserved for mobile telephony.
- Exclusive **Elika design patented** by Fracarro.

ELIKA 700 C		
Code		213229
Elements		1
Band		UHF
Channel		E21-E48
Bandwidth	MHz	470-694
Gain	dBi	17
Front/Back ratio	dB	32
Return loss	dB	-18
Beam width (3dB)	°	±22
Wind load 120Km/h 729N/m <sup>2</sup>	Kg (N)	19 (186.3)
Connector		F
Impedence	Ohm	75
Max mast diameter	mm	60
Dimensions	cm	92 x 82 x 62
Accessories		
Horizontal polarization		Included

Vertical polarization		Included
Vertical polarization tilt adjustment		Included
Auxiliary boom		-
<b>Dimensions and packaging</b>		
Packing		Single in carton
Pieces		6
EAN code		8016978101047
Multiple EAN		8016978101801
Packaging dimensions	mm	750 x 1010 x 480
Packaging weight	Kg	21.2
Unit weight	Kg	2.30
Total weight	Kg	18

## Gain (x: MHz frequency, y: ISO dBi gain) and Polar diagram (@600MHz)

