


ELIKA COMBO 700

Combo Aerials

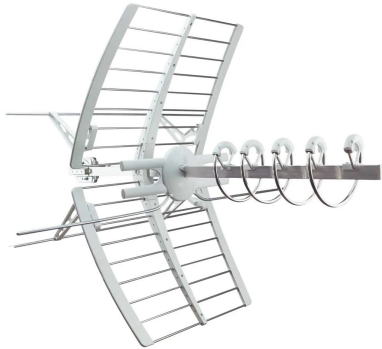

Helical broadband aerial with F connector, it is an evolution of the Loop Yagi technology, already adopted to Fracarro.



Technical Chars

- Pre-assembled directors, radiator and reflectors snap onto a slide already present on the cradle; **assembly** is completed **without** the need for any **tools**.
- Special attention was paid to the choice of materials to achieve higher **robustness**.
- High gain and **extraordinary directivity with almost no side lobes**.
- Innovative pole mount with zenith adjustment as standard and knurled surface for optimum strength and hold to the pole, and **large butterfly nut** for **tightening without the need for any tools**.
- An **LTE filter** has been built into the dipole radiator to ensure the quality of the distributed signal and to achieve excellent filtering of **5G and 4G interfering** signals in the LTE band (694-860 MHz) reserved for mobile telephony.
- Fracarro's exclusive **patented Band III reflector coupling** and Elika design.

ELIKA COMBO 700		
Code		213234
Elements		2/1
Band		3+DAB / UHF
Channel		E5-E12 + DAB / E21-E48
Bandwidth	MHz	174-240 / 470-694
Gain	dBi	7 / 15.5
Front/Back ratio	dB	20 / 32
Return loss	dB	-14 / -18
Beam width (3dB)	°	±28 / ±24
Wind load 120km/h 729N/m ²	kg (N)	20 (196.1)
Connector		F
Impedence	Ω	75
Max mast diameter	mm	60
Dimensions	cm	100 x 82 x 100
Accessories		
Horizontal polarisation		Included

Vertical polarisation		Included
Vertical polarisation tilt adjustment		Included
Auxiliary boom		-
Dimensions and packaging		
Pieces		2
EAN code		8016978105199
Multiple EAN		8016978105380
Packaging dimensions	mm	1110 x 770 x 220
Packaging weight	kg	7.805
Unit weight	kg	2.7
Total weight	kg	7.8

Gain (x: MHz frequency, y: ISO dBi gain) and Polar diagram (@200MHz)

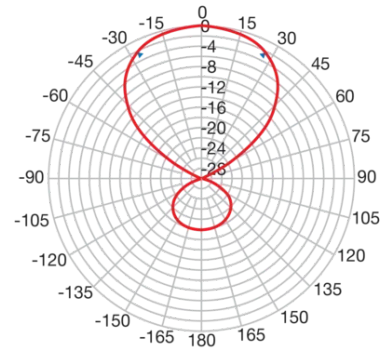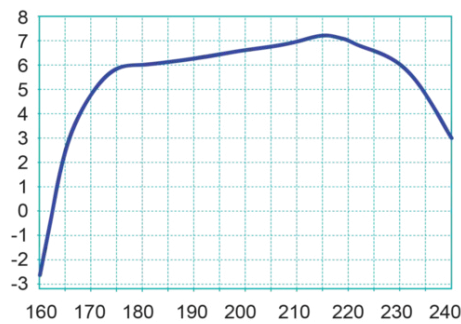

Gain (x: MHz frequency, y: ISO dBi gain) and Polar diagram (@600MHz)

