


## SWP508TS

Compact

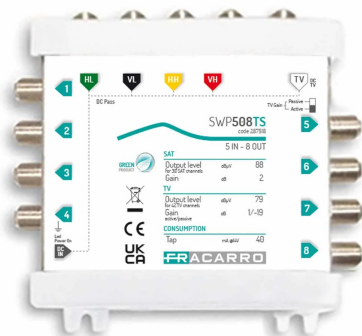

**5-input compact multiswitch with 8 output taps;** DIP switch to select **active and passive TV gain**.

## Technical Chars

- Satellite band up to 2300MHz.
- **High output level** to cover long cable distances(**60m** with 6.7mm cable).
- Each port has an LED to show correct reception of DiSEqC commands.
- Return channel included when TV gain is passive (5-65MHz).
- **When TV gain is passive, the product is fully powered by the receivers**, the power supply only serves to power the active TV gain, other amplifiers and LNBs.
- **External PSU1215TS power supply** (12V, 1.5A) included in **the package** with Male Jack connector (2.1x5.5x12; inside positive, outside negative) to optimise installation space and reduce maintenance time.
- Small size due to matrix switching system with connectors on both sides.
- Easy to install thanks to standard input colouring.

SWP508TS		
Code		287518
Inputs	4 SAT, 1 TV	
Taps		8
SAT		
Bandwidth	MHz	950-2300
Gain	dB	-2/2
Max Output level	dBμV	100
TV		
TV bandwidth	MHz	Active TV: 47-862; Passive TV: 5-862
Gain (Active)	dB	1
Gain (Passive)	dB	-19
Max Output level	dBμV	Active TV gain: 92
Return channel		
Bandwidth	MHz	Passive TV: 5-65

Consumption		
Tap	mA	40
Power supply voltage	Vdc/A	120-240 / 50-60
Absorption	mA	Active TV: 160@12V; Passive TV: entirely fed by the receiver
Maximum power supply current SAT	mA	Passive TV: 1500; Active TV: 1340
Specifications		
Dimensions power supply	mm	90x70x45
Operating temperature	°C	-10 to +55
SAT-SAT Isolation	dB	>30
Dimensions and packaging		
Pieces		1
EAN code		8016978102334
Packaging dimensions	mm	250 x 155 x 45
Product dimensions	mm	110 x 130 x 40
Packaging weight	Kg	0.303