


SWP532TS

Compact

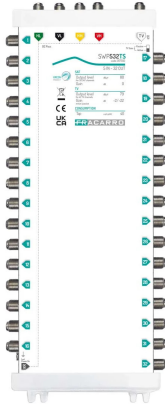

Compact multiswitch with **5 inputs** and **32 derived outputs** with DIP switch to select **active or passive TV gain**.

Technical Chars

- Satellite band up to 2300MHz.
- **High output level** to cover long cable distances(**60m** with 6.7mm cable).
- Each port has an LED to show correct reception of DiSEqC commands.
- Return channel included when TV gain is passive (5-65MHz).
- **When TV gain is passive, the product is fully powered by the receivers**, the power supply only serves to power the active TV gain, other amplifiers and LNBs.
- **External PSU1215TS power supply** (12V, 1.5A) included in **the package** with Male Jack connector (2.1x5.5x12; inside positive, outside negative) to optimise installation space and reduce maintenance time.
- Small size due to matrix switching system with connectors on both sides.
- Easy to install thanks to standard input colouring.

SWP532TS		
Code		287592
Inputs		4 SAT, 1 TV
Taps		32
SAT		
Bandwidth	MHz	950-2300
Gain	dB	-4/0
Max Output level	dB μ V	100
TV		
TV bandwidth	MHz	Active TV: 47-862; Passive TV: 5-862
Gain (Active)	dB	-2
Gain (Passive)	dB	-22
Max Output level	dB μ V	Active TV: 92
Return channel		
Bandwidth	MHz	Passive TV: 5-65

Consumption		
Tap	mA	40
Power supply voltage	Vdc/A	120-240 / 50-60
Absorption	mA	Active TV: 160@12V; Passive TV: entirely fed by the receiver
Maximum power supply current SAT	mA	Passive TV: 1500; Active TV: 1340
Specifications		
Dimensions power supply	mm	90 x 70 x 45
Operating temperature	°C	-10 to +55
SAT-SAT Isolation	dB	>30
Dimensions and packaging		
Pieces		1
EAN code		8016978105427
Packaging dimensions	mm	255 x 242 x 55
Product dimensions	mm	300 x 130 x 40
Packaging weight	Kg	1.561