

LP345F 5G

Combo Aerials



Log-periodic pre-assembled aerials for broadband characterized by extremely easy connection due to the F connector being located near the mast clamp.



Technical Chars

- Thanks to the special pole mount, the aerial can be installed in both vertical and horizontal **polarisation without adaptors** or other accessories.
- **The geometric distribution of the dipoles** has been **redesigned** to achieve excellent filtering for interfering signals in the 5G and 4G LTE band above 694 MHz reserved for mobile telephony.
- It features excellent mechanical resistance for fixing the elements to the cradle, excellent mechanical resistance to rotation on the pole, and good electrical performance.
- The F connector is protected by a bayonet connector cover.
- **White colour** aerial.

LP345F 5G		
Code		216257
Elements		16+16
Band		3+DAB / UHF
Channel		E5-E12 + DAB / E21-E48
Bandwidth	MHz	174-240 / 470-694
Gain	dBi	9.5 / 11.5
Front/Back ratio	dB	24 / 32
Return loss	dB	-16 / -16
Beam width (3dB)	°	±34 / ±31
Wind load 120Km/h 729N/m²	Kg (N)	3.9 (38.2)
Connector		F
Impedence	Ohm	75
Max mast diameter	mm	60
Dimensions	cm	115 x 86
Accessories		
Horizontal polarization		Included
Horizontal polarization tilt adjustment		PV10 (210011)
Vertical polarization		Included

Vertical polarization tilt adjustment		PV10 (210011)
Auxiliary boom		-
Dimensions and packaging		
Pieces		20
EAN code		8016978104451
Multiple EAN		8016978104710
Packaging dimensions	mm	1100 x 1100 x 420
Packaging weight	Kg	20
Unit weight	Kg	1.12
Total weight	Kg	22.9

Gain (x: MHz frequency, y: ISO dBi gain) and Pattern (@200MHz)

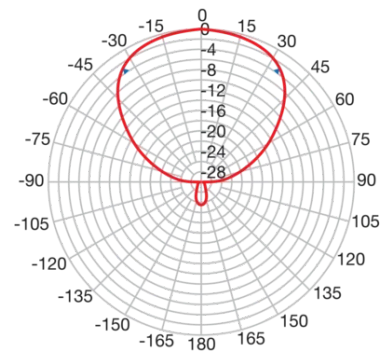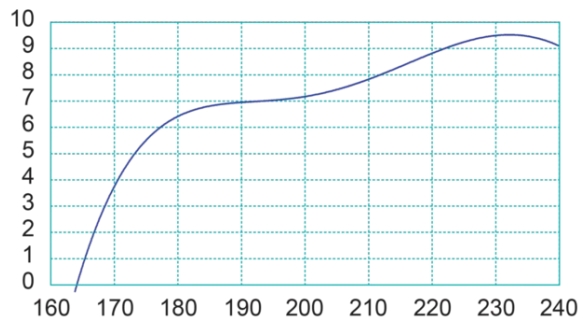

Gain (x: MHz frequency, y: ISO dBi gain) and Pattern (@600MHz)

