


## OPT-RX-DT

Home fibre

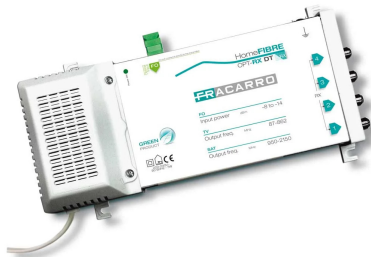

The OPT-RX DT receiver converts the incoming optical signal into 4 universal outputs thus making available to 4 different users the TV and SAT signal with all services and content offered by broadcasters, as if they were directly connected to their own aerial and dish. The product comes with a power supply and should therefore be connected to the mains via its power cord

OPT-RX-DT		
Code		270693
Optical input		
Optical input connector		1 SC/APC
Wavelength input	nm	1310
Optical input power	dBm	≤ -8
RF output		
Connectors type		F Female
Return loss	dB	-10
Outputs		4 (TV + SAT)
Output level TV		
8dBmo 8 transponder	dBμV	80
8dBmo 16 transponder	dBμV	77
8dBmo 40 transponder	dBμV	73
14dBmo 8 transponder	dBμV	68
14dBmo 16 transponder	dBμV	65
14dBmo 40 transponder	dBμV	61
Output level SAT		
8dBmo	dBμV	78
14dBmo	dBμV	66
Specifications		
Power supply voltage	Vdc/A	184-264 / 50-60
Current consumption	W	7
LED		Green power supply light
Operating temperature	°C	-5 to +50
Conformity		CEI EN 50083-2 EN60065

Dimensions and packaging		
Pieces		1
EAN code		8016978091812
Packaging dimensions	mm	285 x 170 x 75
Product dimensions	mm	250 x 125 x 50
Packaging weight	kg	0.77