


SWI8908PLUS

Cascadable

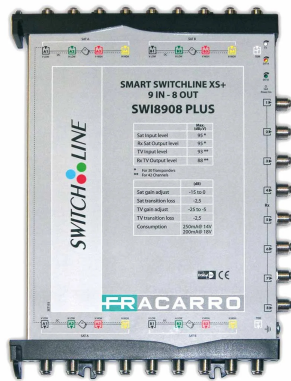

9-input cascadable multiswitch with 8 output taps; active gain and separate TV and Satellite gain Adjustment (independent for SAT A e SAT B).

Technical Chars

- TV gain adjustment.
- 2 separate Satellite, Satellite A and Satellite B signal gain settings.
- High isolation (> 45dB).
- Low pass loss.
- **Very high output level** to cover long cable distances(100m with 6.7mm cable).
- Return channel included.
- Low power consumption.
- Easy to install due to standard input colouring

SWI8908PLUS		
Code		271067
Inputs		8 SAT, 1 TV
Outputs		8 SAT, 1 TV
Taps		8
SAT		
Bandwidth	MHz	950-2150
Gain	dB	-2/3
Gain adjustment	dB	15
Max Output level	dBμV	110
Insertion loss	dB	-2
TV		
TV bandwidth	MHz	85-862
Gain (Active)	dB	-7/-3
Gain adjustment	dB	20
Max Output level	dBμV	107
Insertion loss	dB	-1.5

Return channel		
Bandwidth	MHz	5-65
Gain	dB	-3
RC max output level	dB μ V	100
Insertion loss	dB	-1.5
Consumption		
Absorption	mA	350@14V; 280@18V
Specifications		
Operating temperature	°C	-10 to +55
SAT-SAT Isolation	dB	>45
Dimensions and packaging		
Pieces		1
EAN code		8016978081417
Packaging dimensions	mm	307 x 196 x 36
Product dimensions	mm	260 x 180 x 30
Packaging weight	kg	1.044