

BLV6F



Premounted 6 elements and high quality **Band III aerial** complete with F connector.


- High **gain**, optimum impedance adaptation and excellent directivity.
- **Exclusive** Fracarro design

CODE		218058
Elements	no.	6
Band		3
Channel		E5-E12
Bandwidth	MHz	174-230
Gain	dBi	13
Front/Back ratio	dB	24
Return loss	dB	-22
Beamwidth (-3dB)	°	±24
Wind load at 120km/h (720N/m ²)	kg (N)	4.5 (44.14)
Connector	Type	F
Impedance	Ω	75
Max mast (Ø)	mm	60
Dimensions (L x H)	cm	149 x 87
Quantity Masterbox	pcs	3
Unit weight	kg	2.00
Total weight	kg	6.7

Accessories

Horizontal polarization	Included
Horizontal polarization Tilt adjustment	Included
Vertical polarization	PV10 (210011)
Vertical polarization Tilt adjustment	PV10 (210011)
Auxiliary boom	N.P.

GAIN

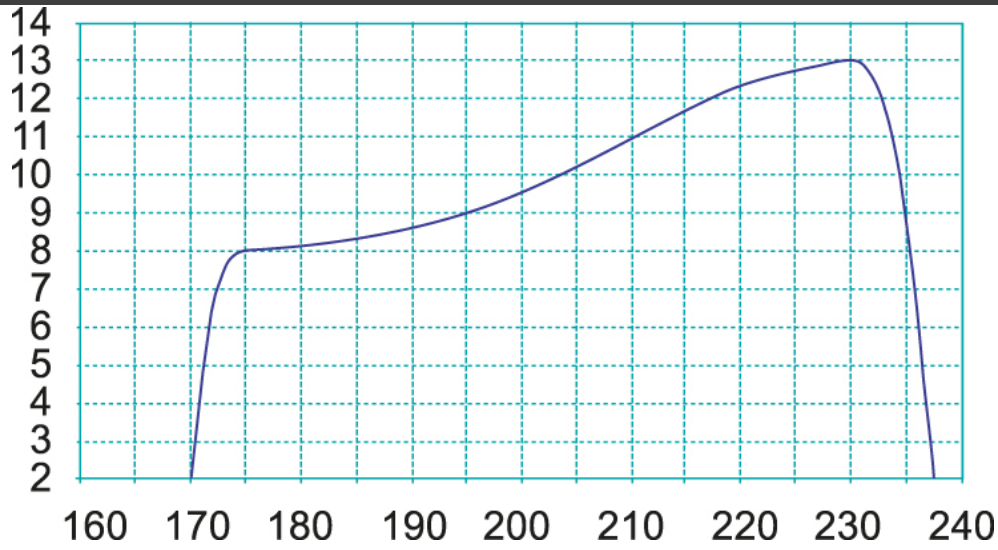

PATTERN

